


Updating Dante card firmware

Requires Dante Controller software provided by Audinate.

<https://www.audinate.com/products/software/dante-controller>

- 1) Make sure your computer is on the same network as the D-Series driver Dante port, using a wired connection, and that there are no firewalls or routing turned on which may prevent or delay communication between the devices.
- 2) Start the Dante Controller as administrator and allow it to make changes to the computer.
- 3) Press Ctrl+U or go to View > Dante Updater. This should open a new page with the connected driver populating one of the three tabs shown below. If there is an update available, Dante Updater will match the corresponding firmware to the driver in the 'Update(s) Available' tab.

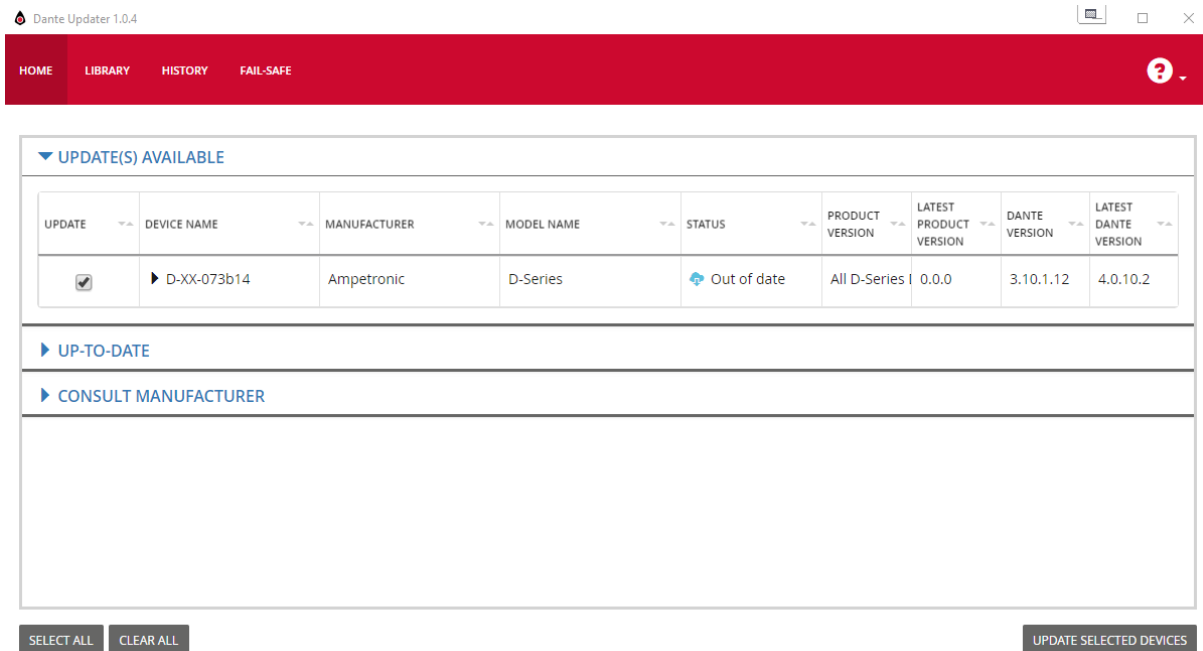


- 4) Select the devices that you want to update and click "Update Selected Devices".
- 5) In the popup tick "I understand that audio will be interrupted." And click "Update Now".

Checked :	AP	Approved :	BDB	Date :	07/07/20	20063	Issue 5	EB38524
-----------	----	------------	-----	--------	----------	-------	---------	---------

1 DEVICES WILL BE UPDATED

DEVICE NAME	IP ADDRESS	UPDATE STATUS
D-XX-073b14	10.2.0.130	Ready for update

 Do not power off or disconnect your computer or devices while updates are in progress
 I understand that audio will be interrupted.

CANCEL

UPDATE NOW

6) Wait for the program to report that it has successfully upgraded the firmware then click "Close".

UPDATING COMPLETED

DEVICE NAME	IP ADDRESS	UPDATE STATUS
D-XX-073b14	10.2.0.130	✓ Successful

CLOSE

7) Close Dante Updater.

Checked :	AP	Approved :	BDB	Date :	07/07/20	20063	Issue 5	EB38524
-----------	----	------------	-----	--------	----------	-------	---------	---------